




Application Data Model

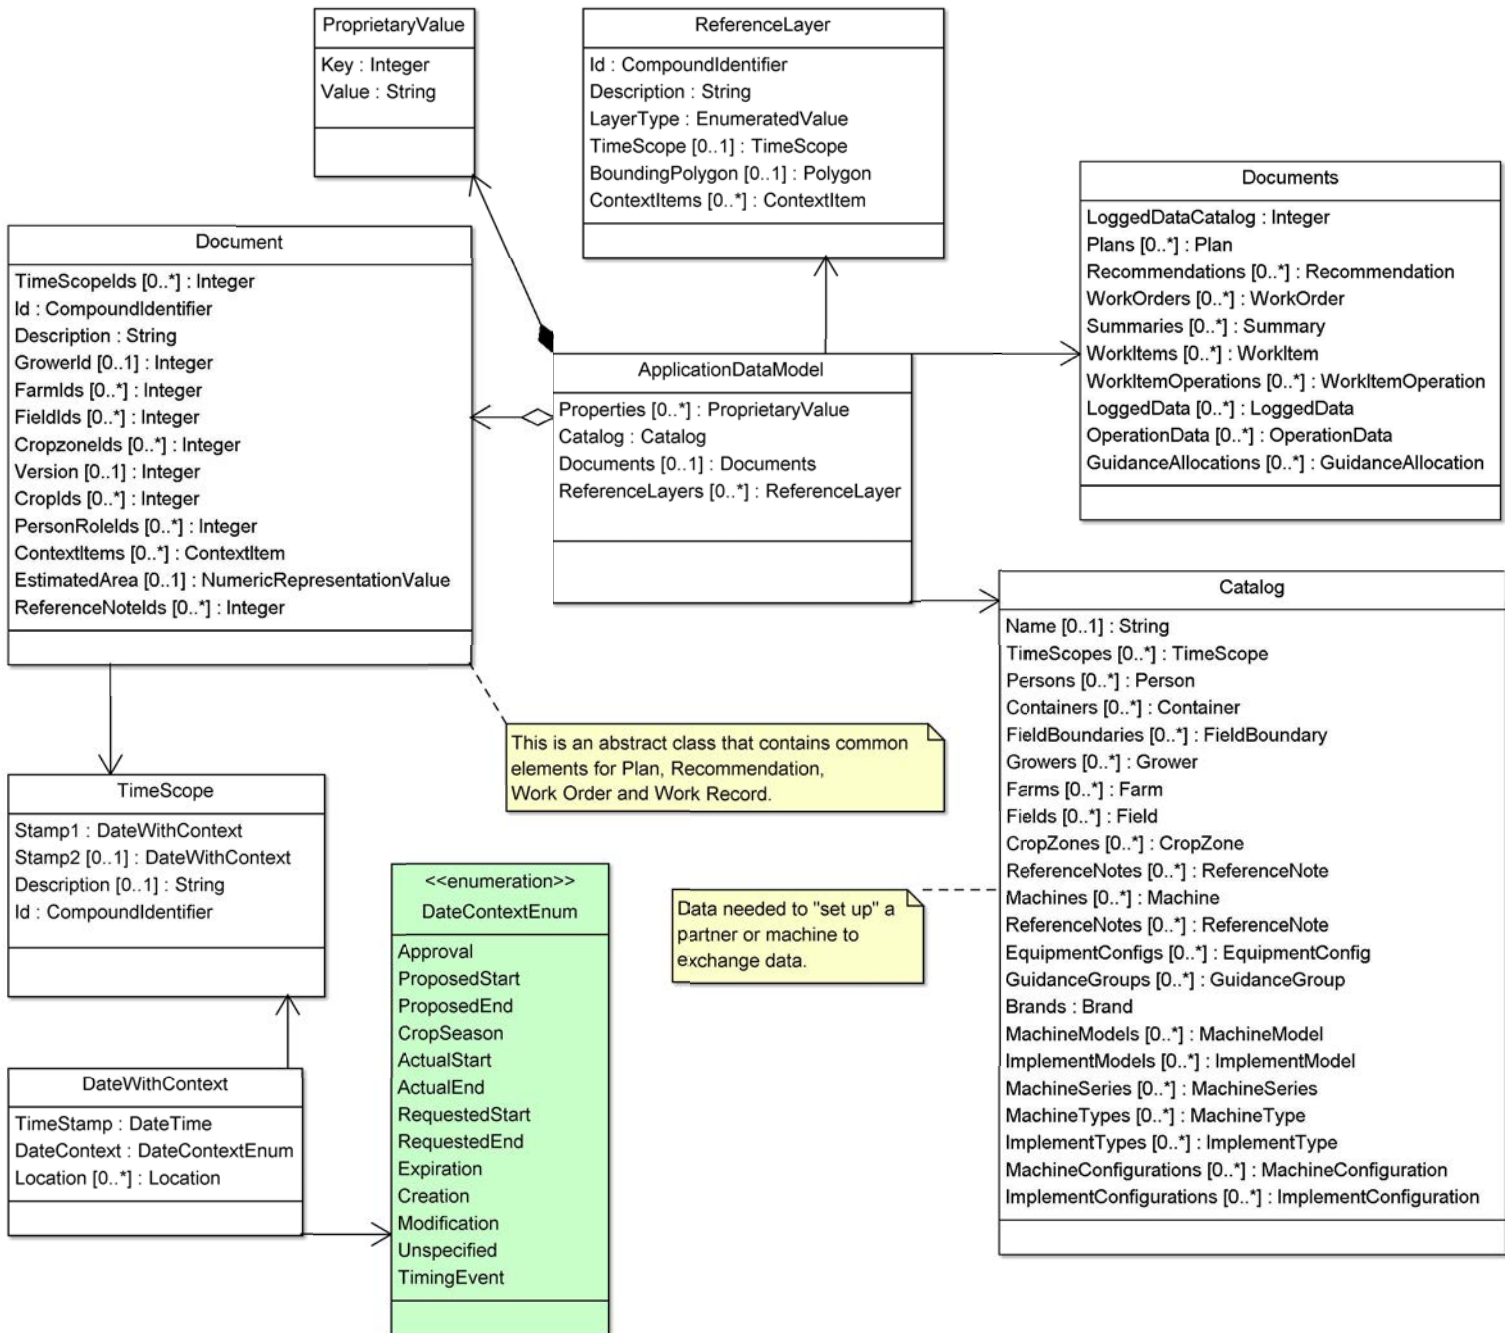


Catalog

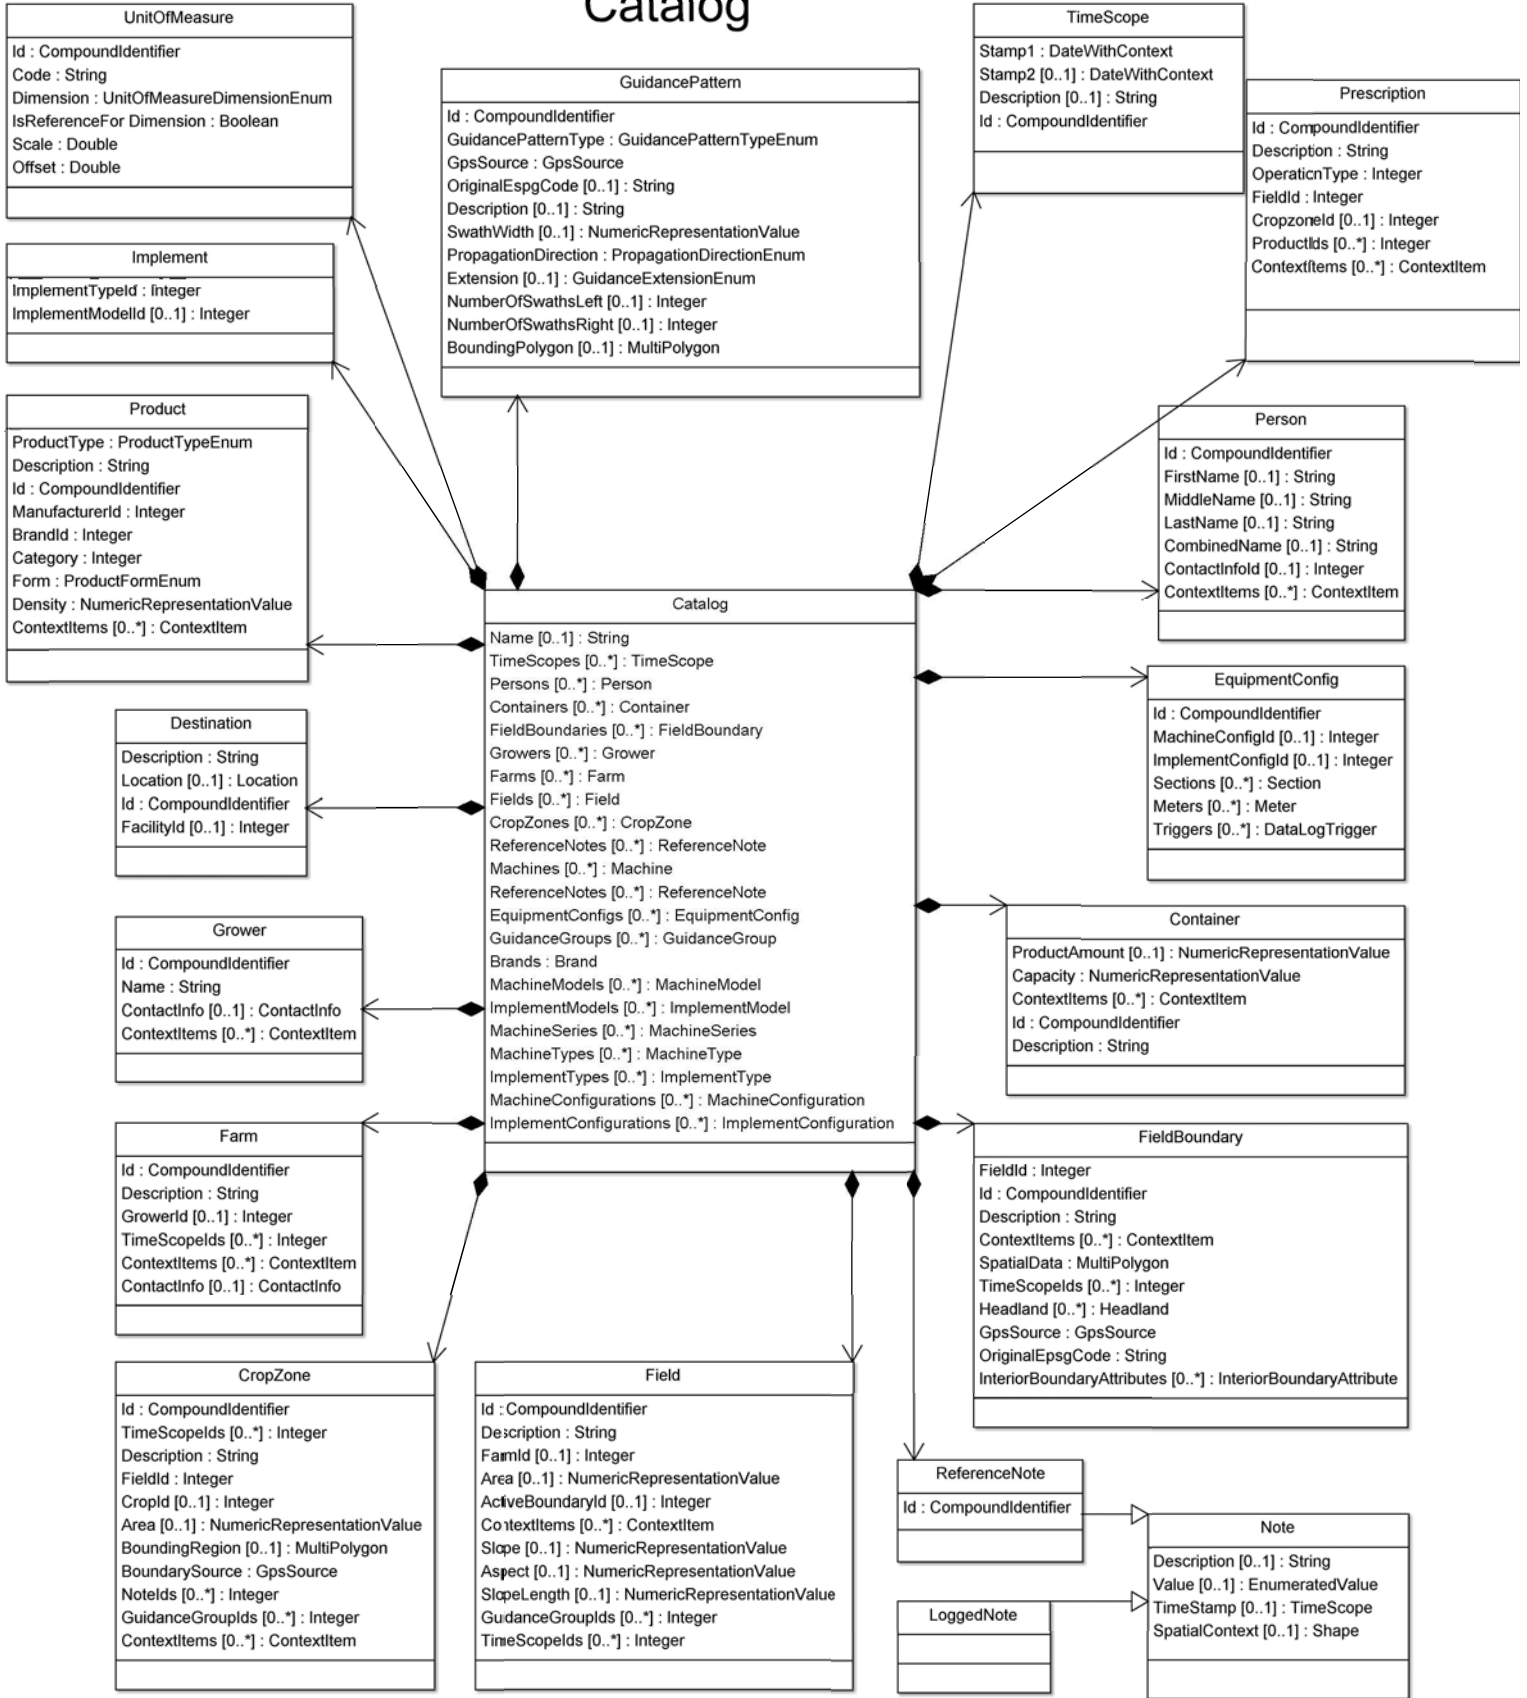


Document

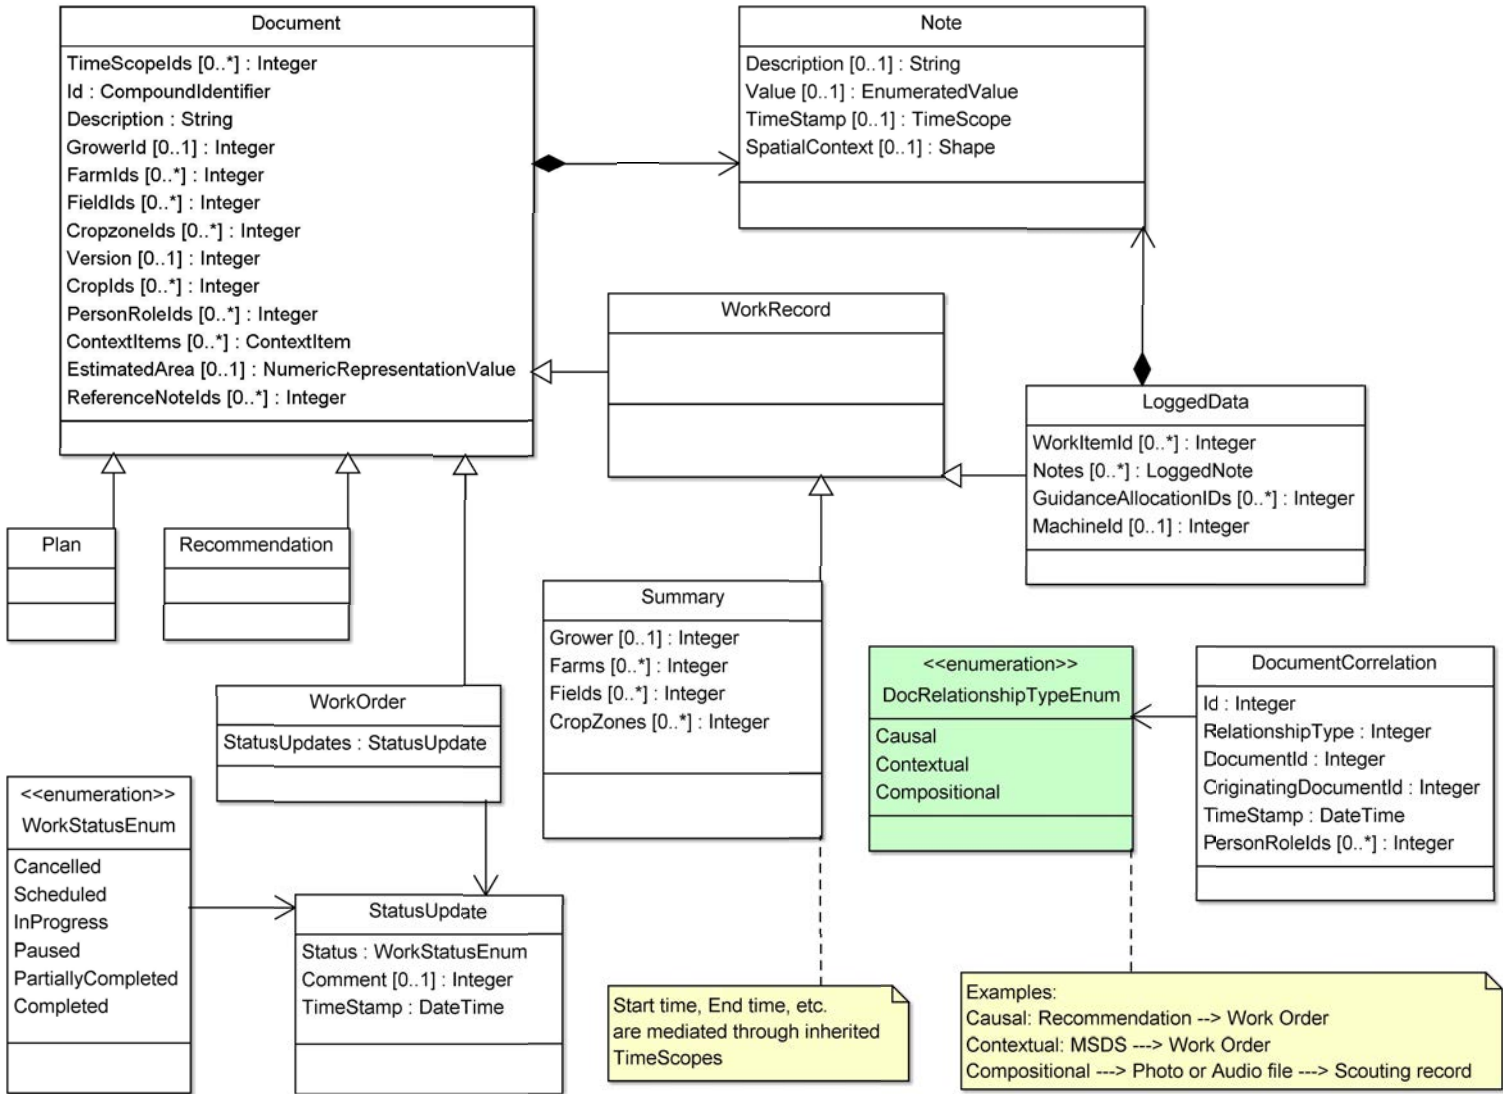


Equipment

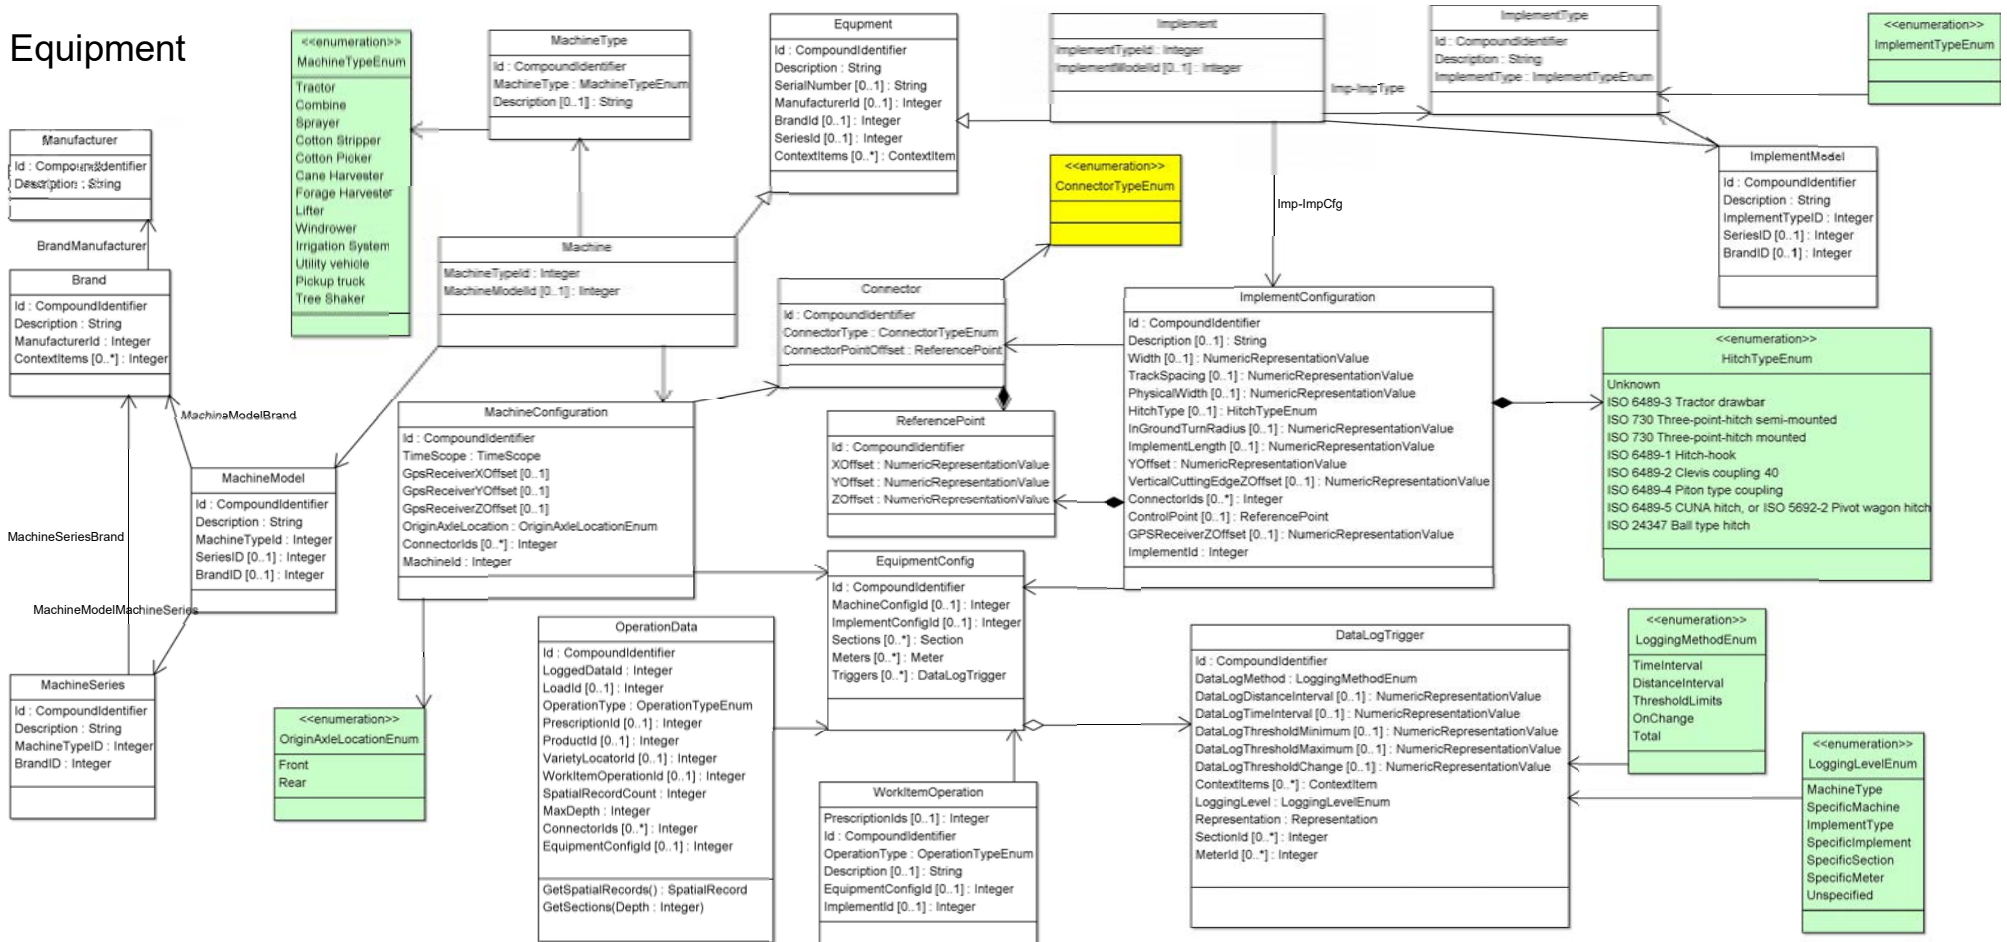


Field Boundary

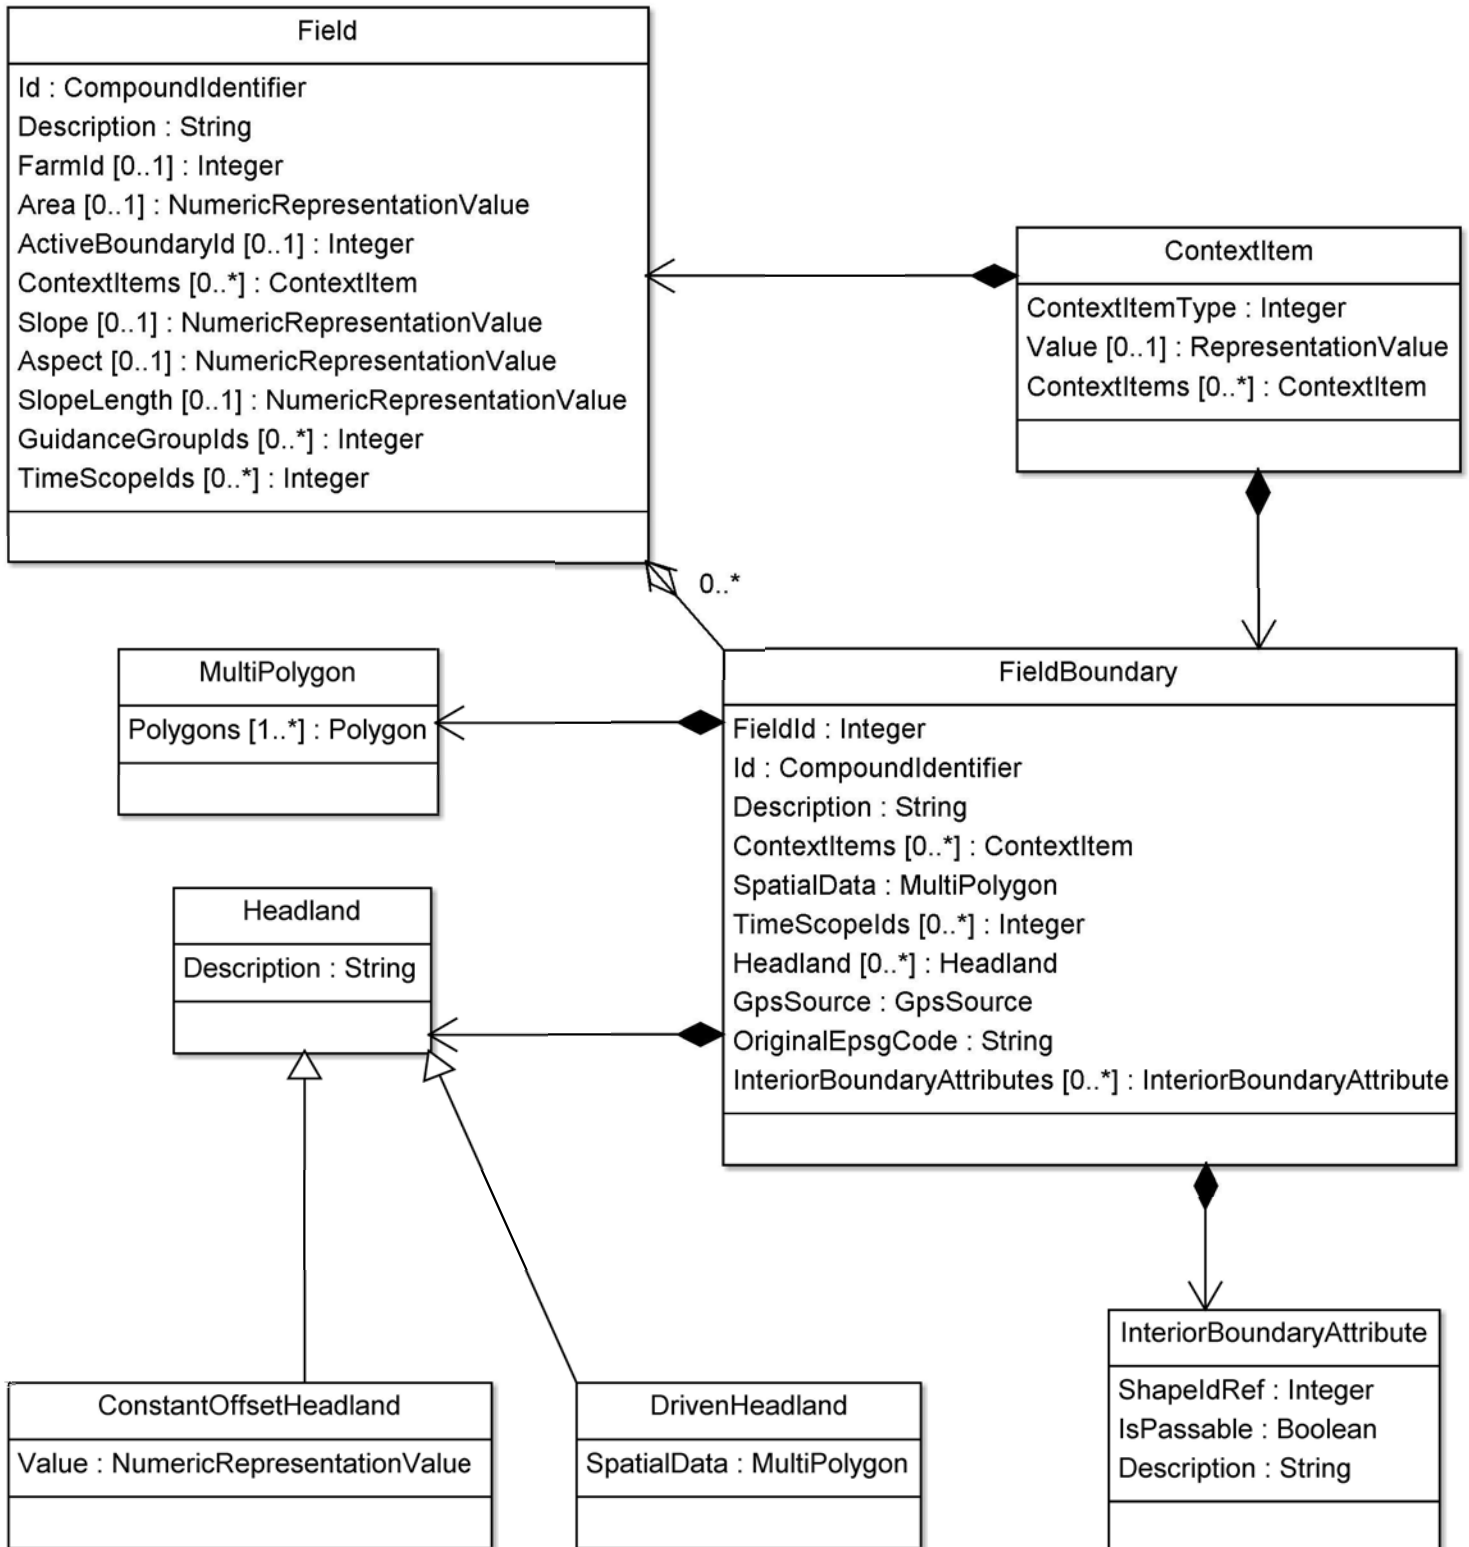


Grower

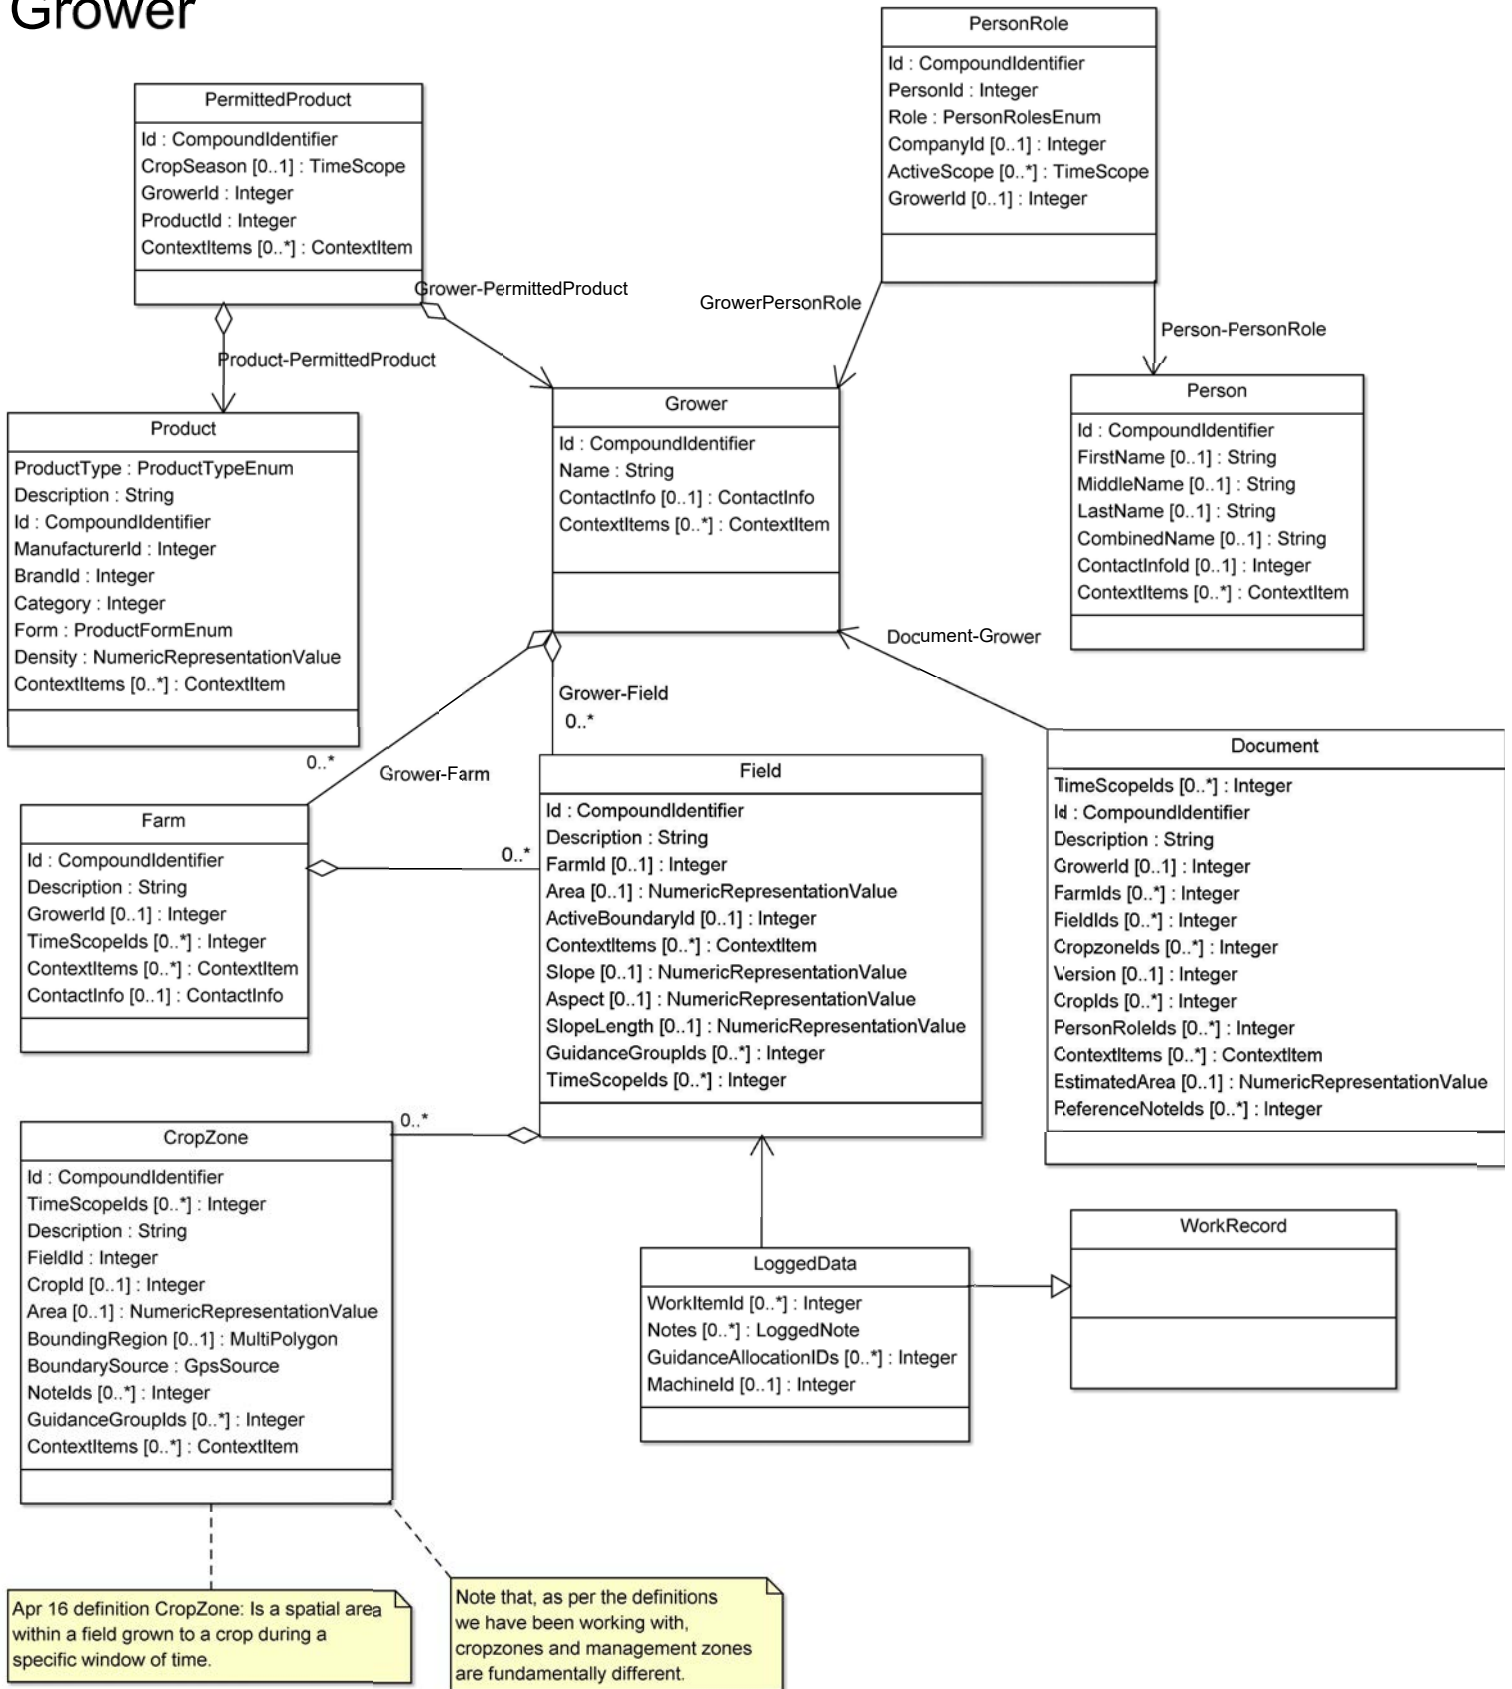


Guidance

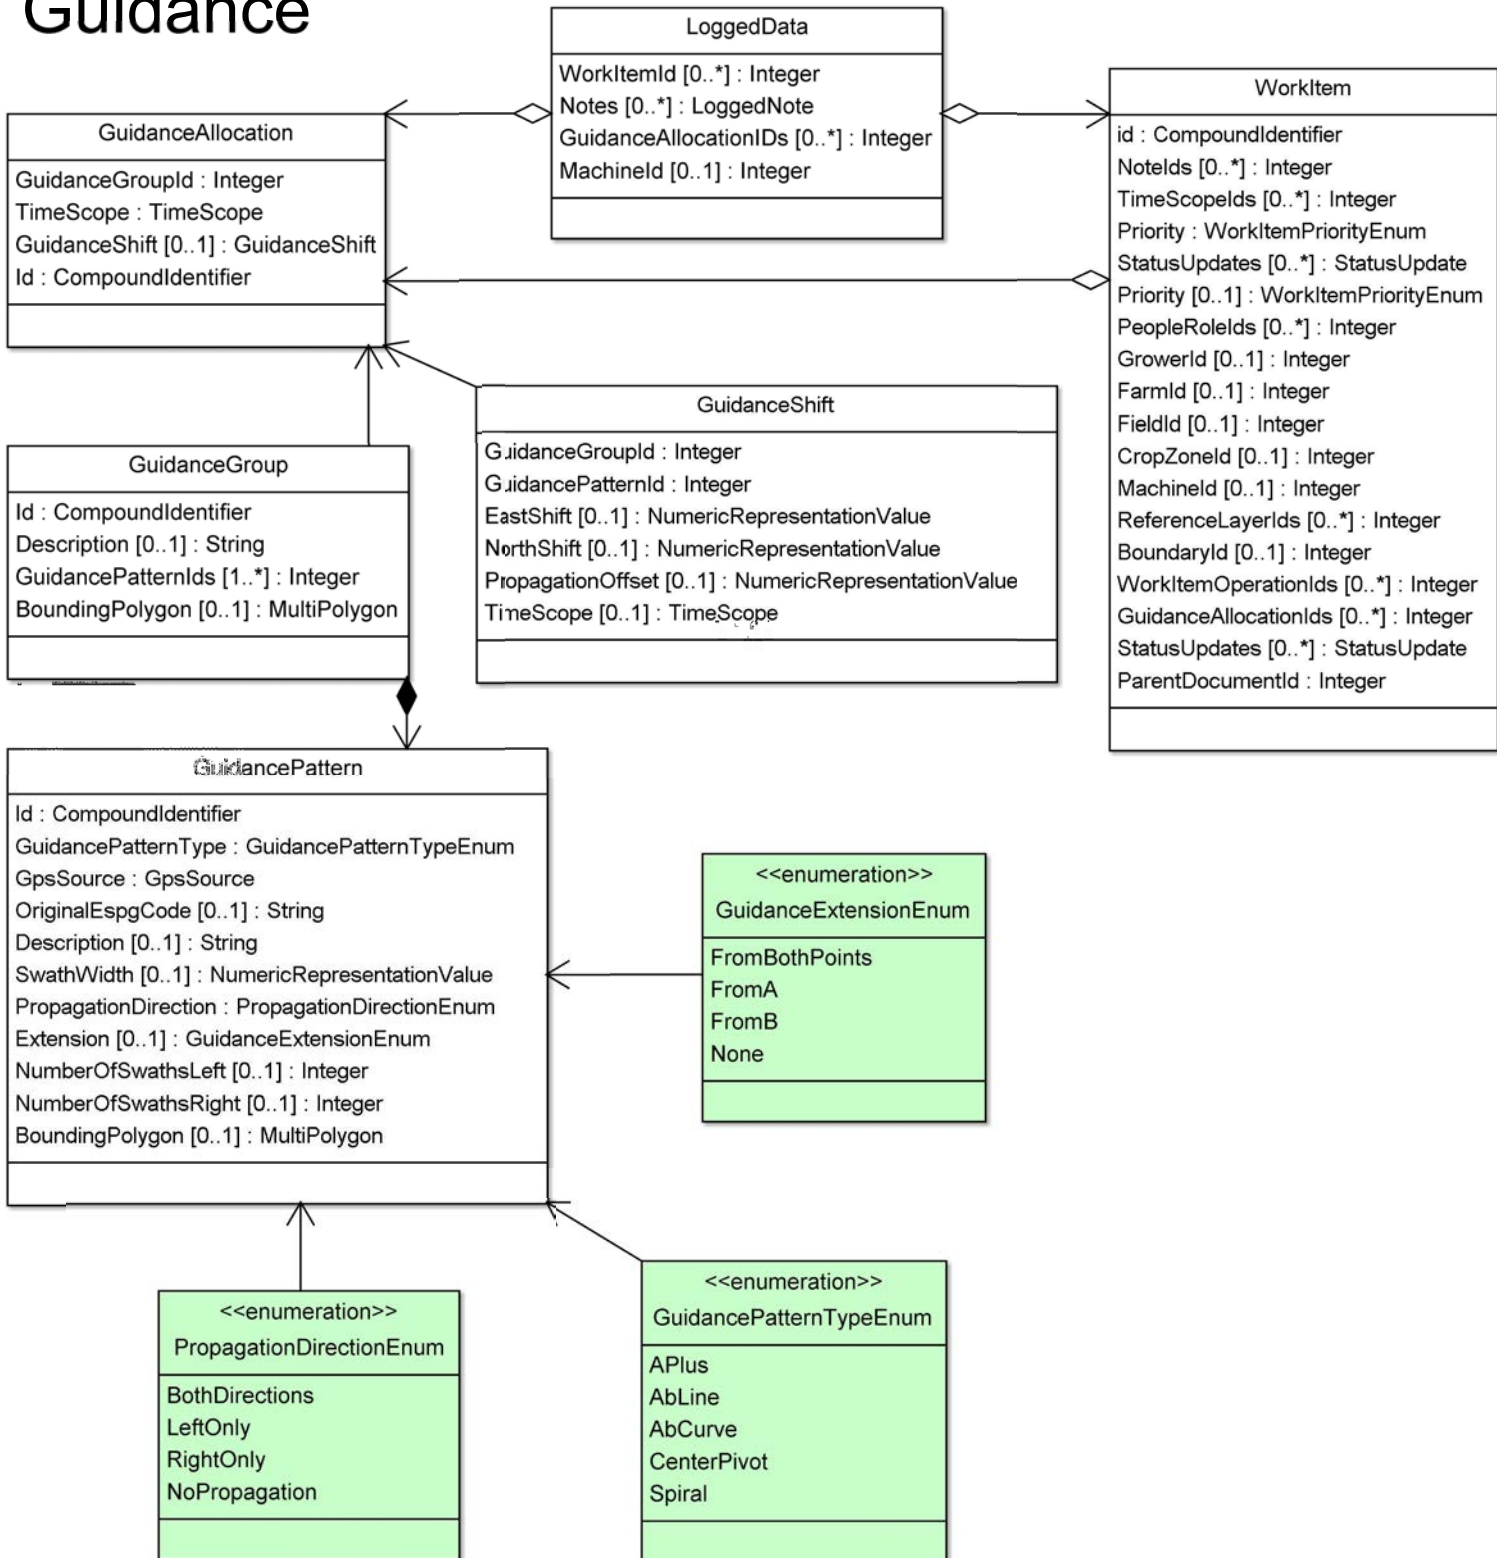


LoggedData

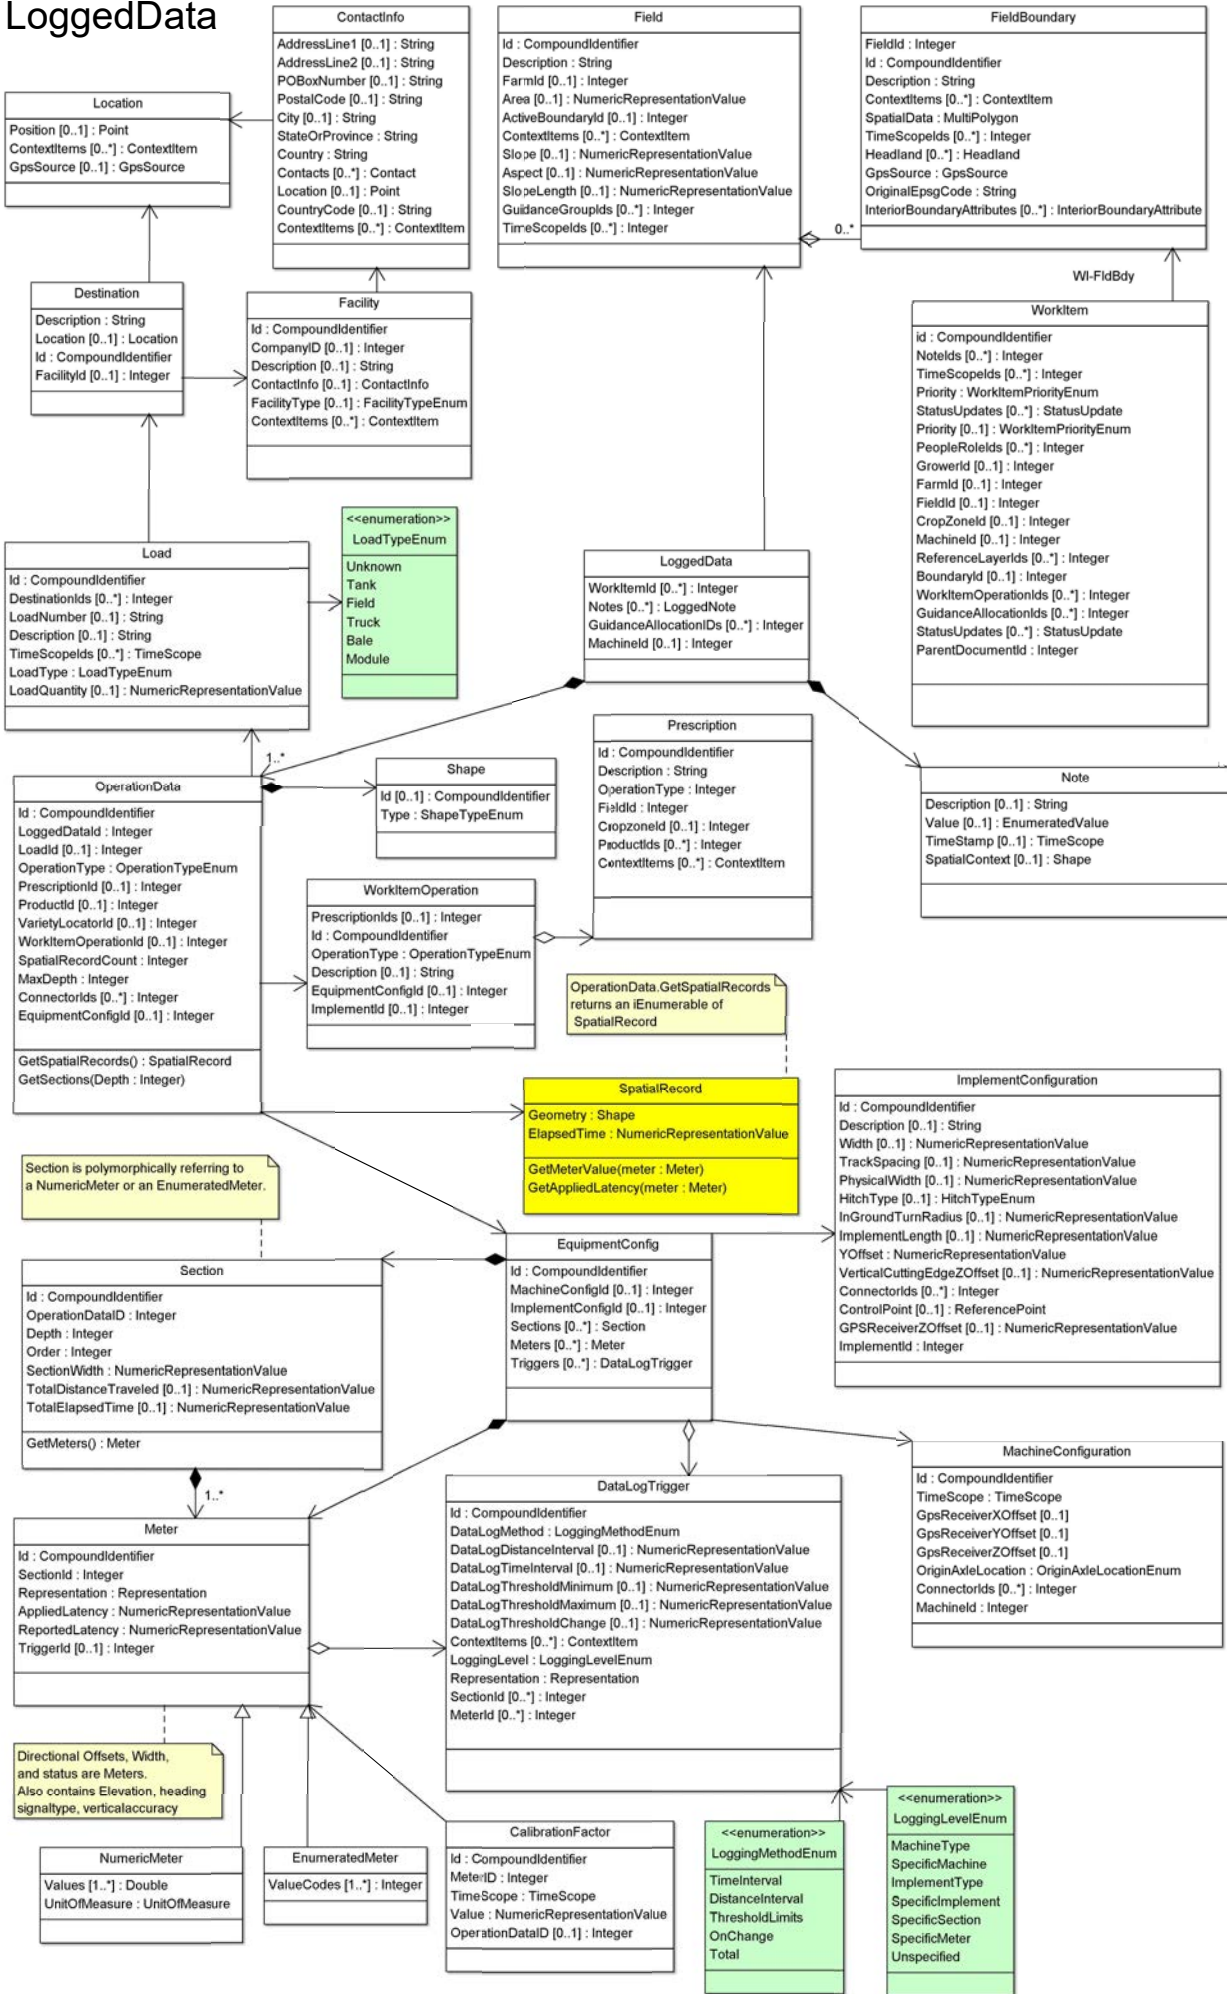


Note

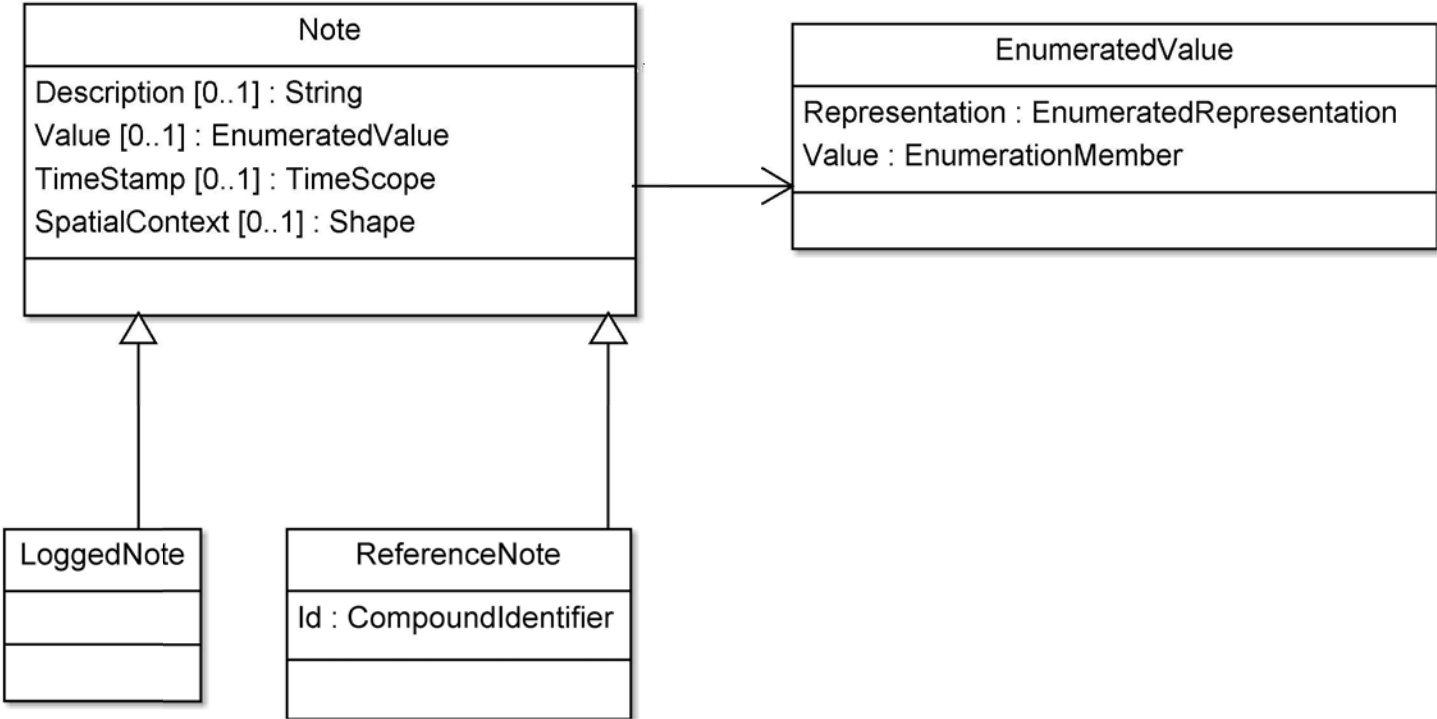


Prescription

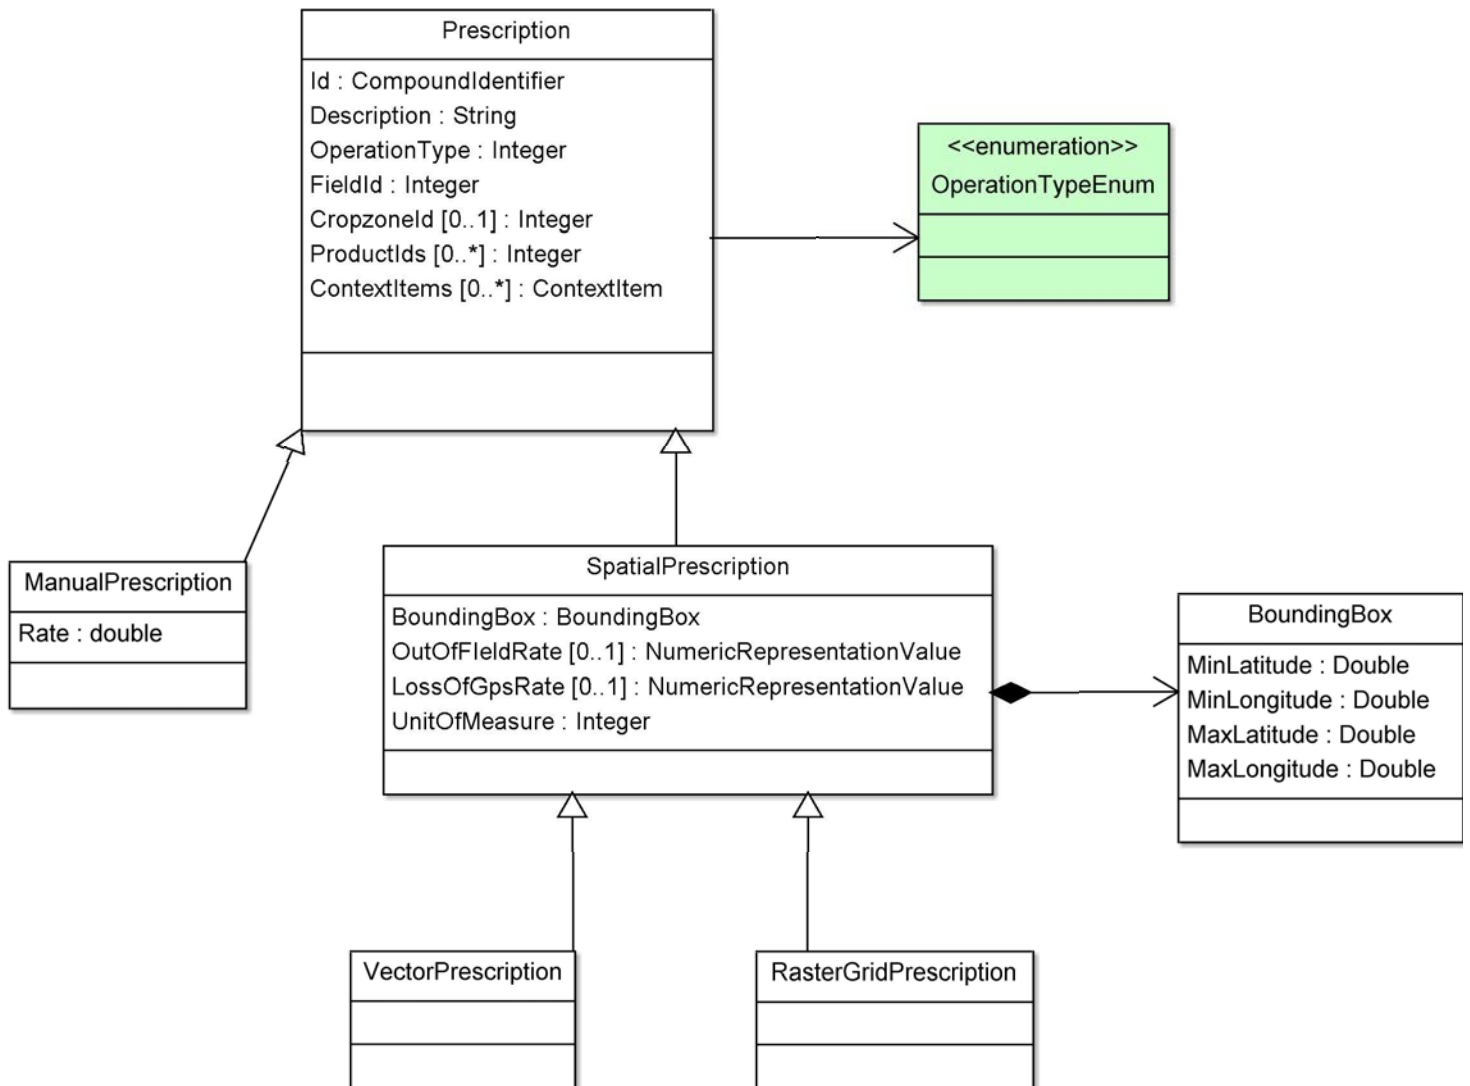

ReferenceLayer

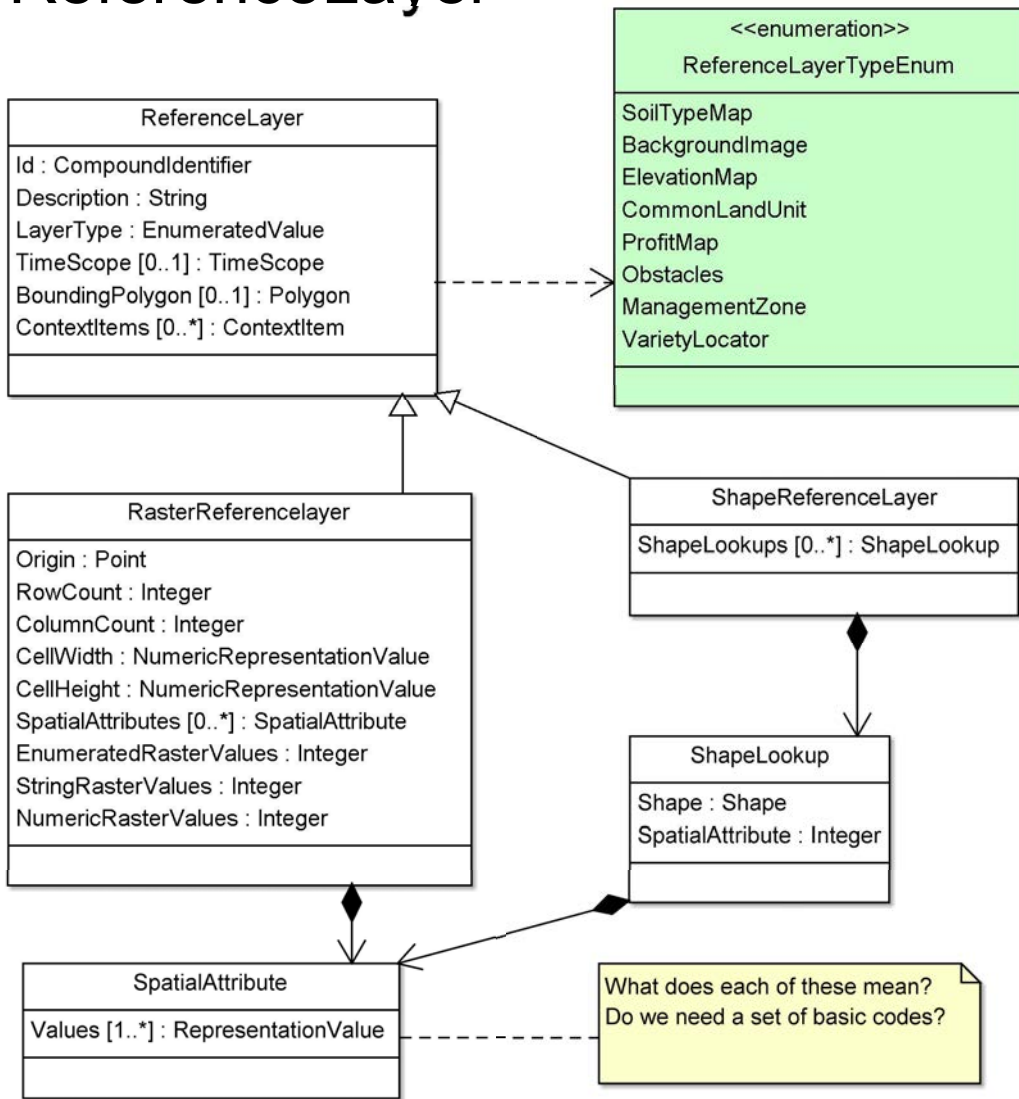


What does each of these mean?
Do we need a set of basic codes?

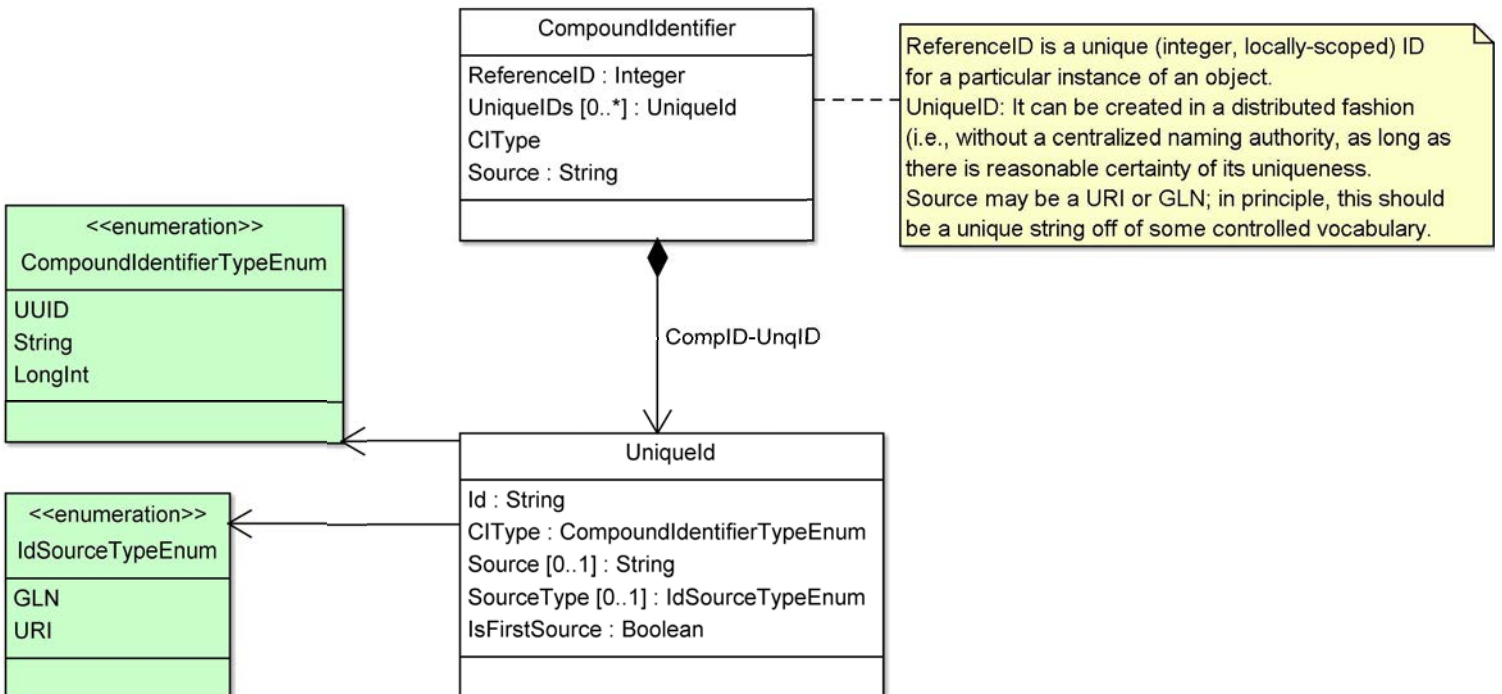


ReferenceID is a unique (integer, locally-scoped) ID for a particular instance of an object.
UniqueID: It can be created in a distributed fashion (i.e., without a centralized naming authority, as long as there is reasonable certainty of its uniqueness).
Source may be a URI or GLN; in principle, this should be a unique string off of some controlled vocabulary.


Representations

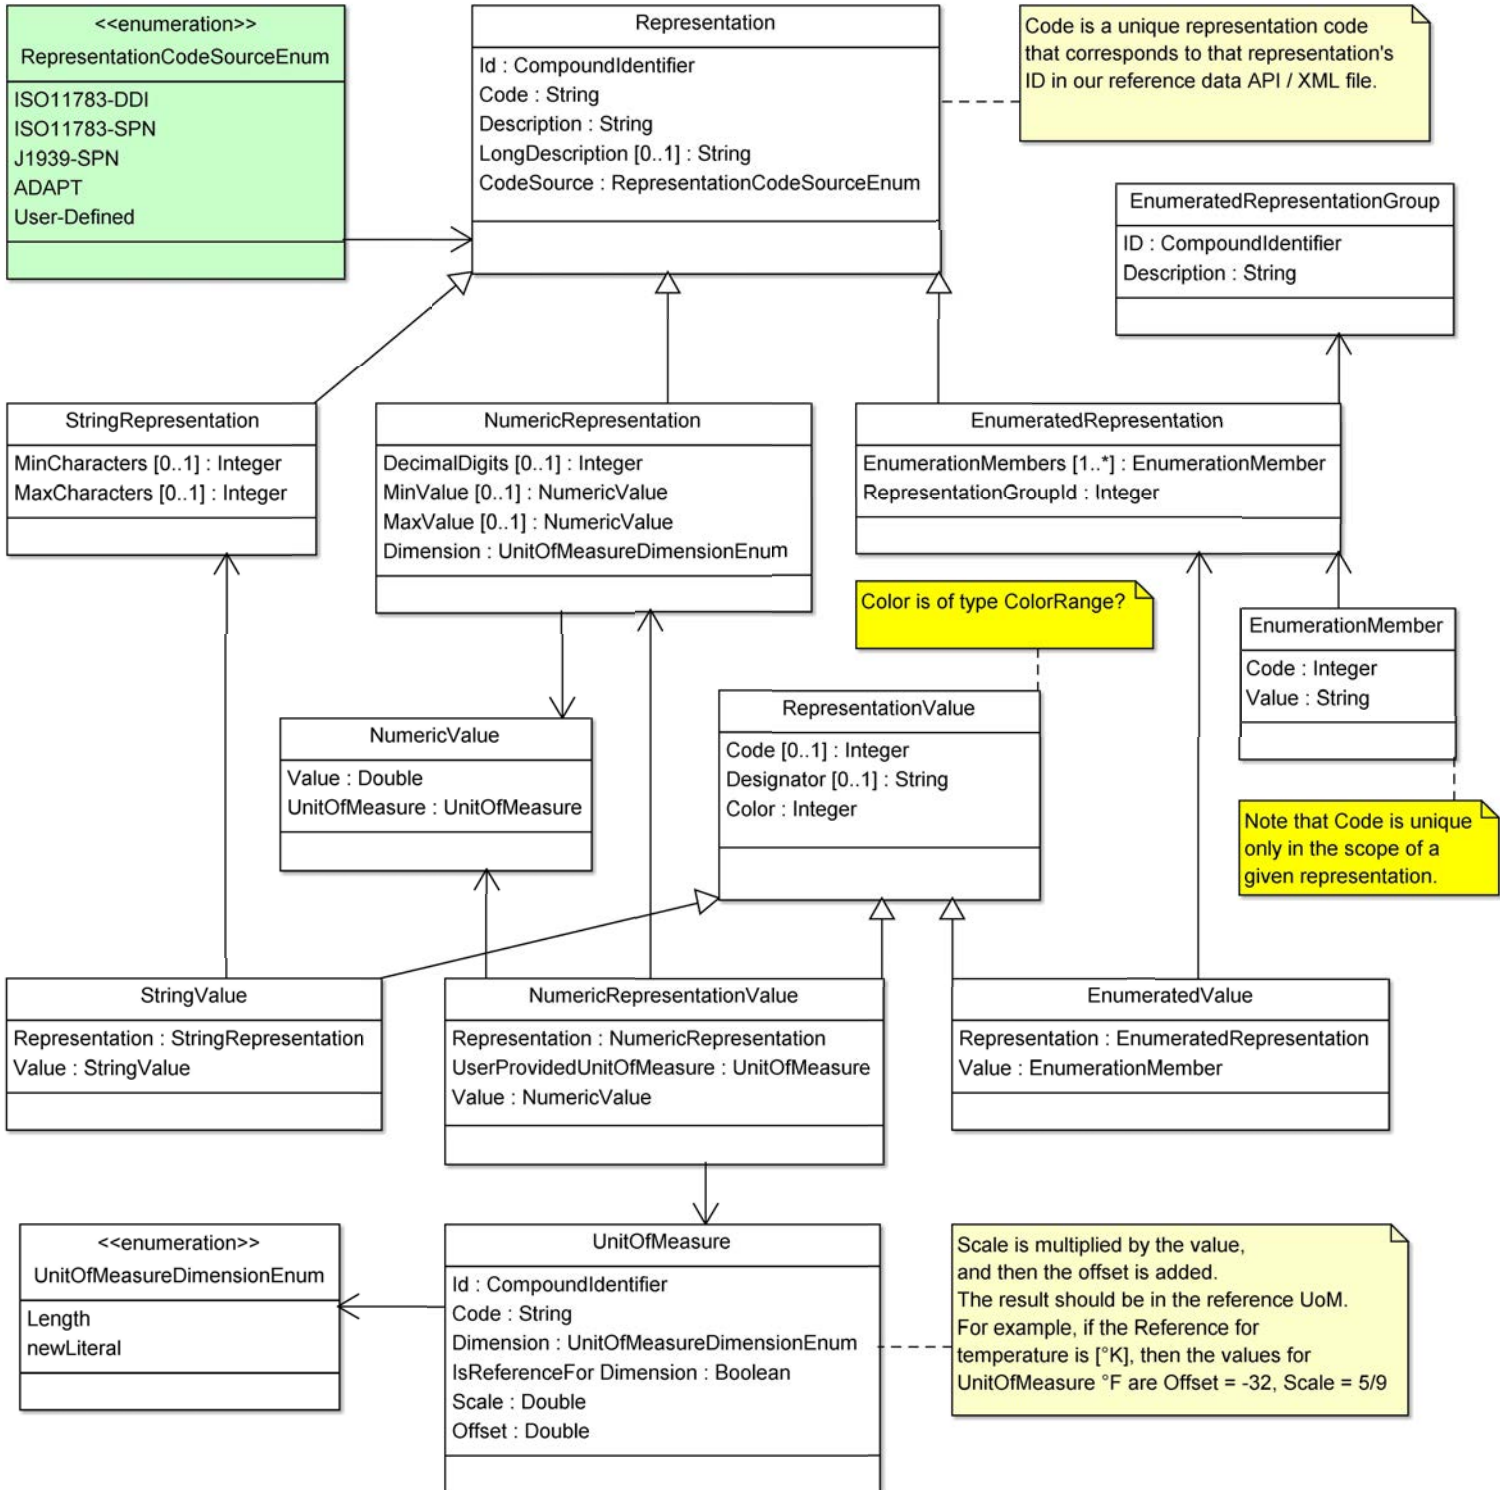


Shape

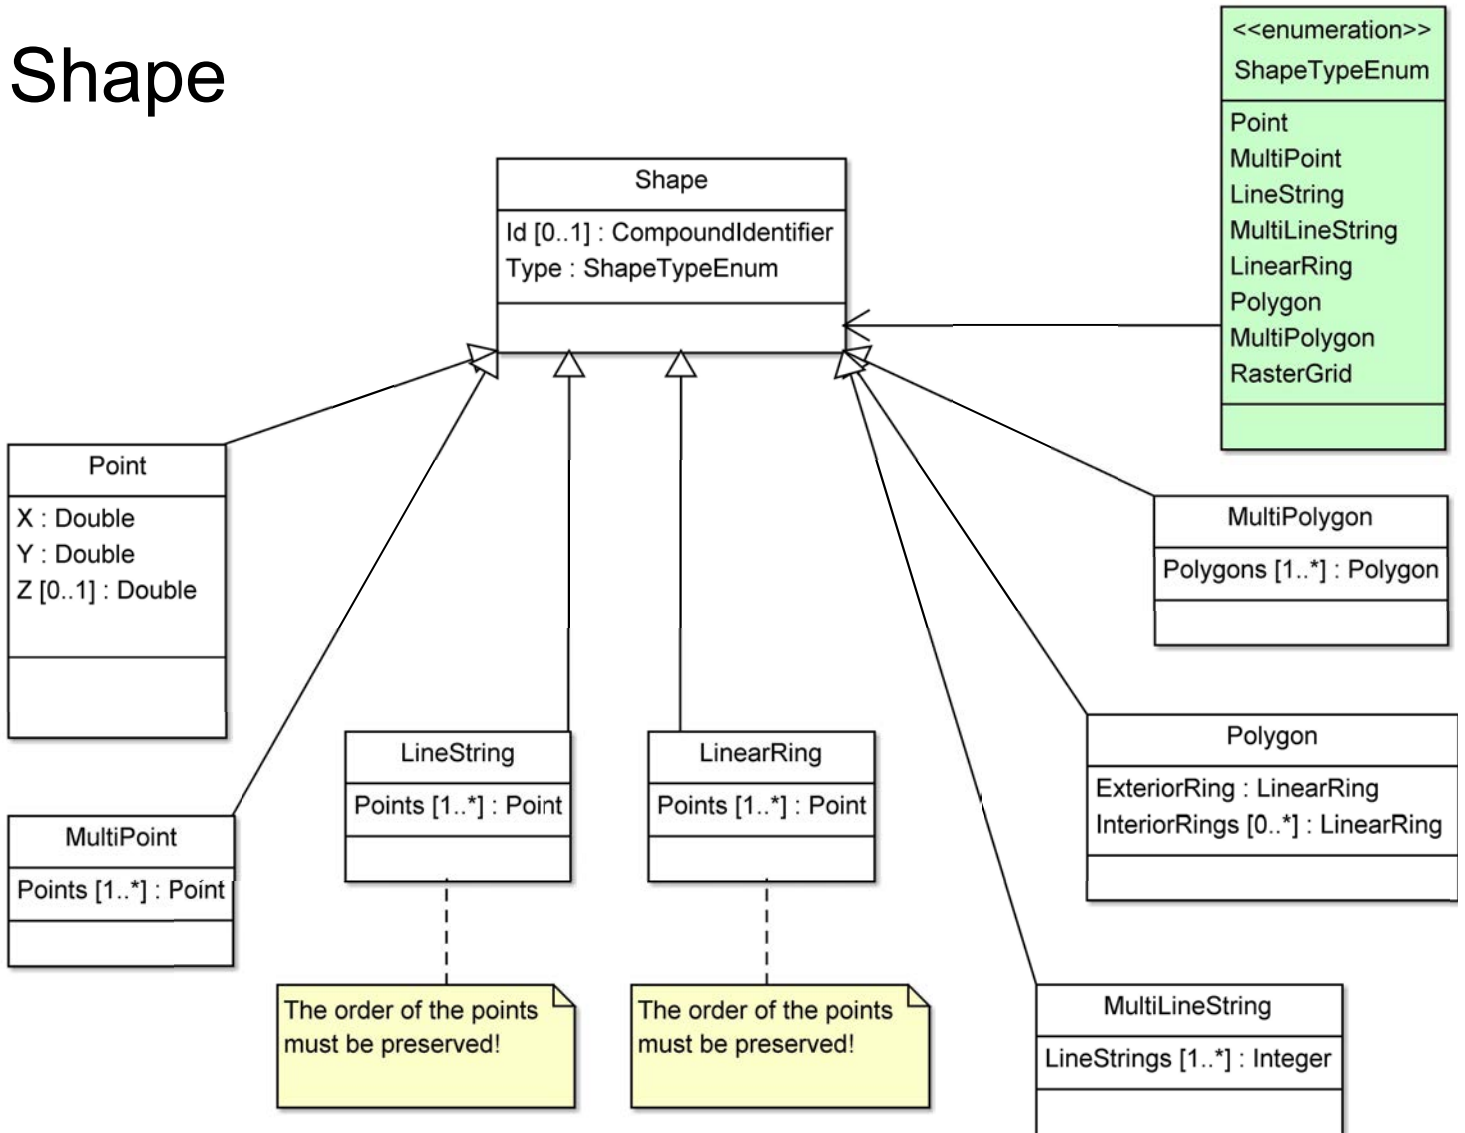

TimeScope

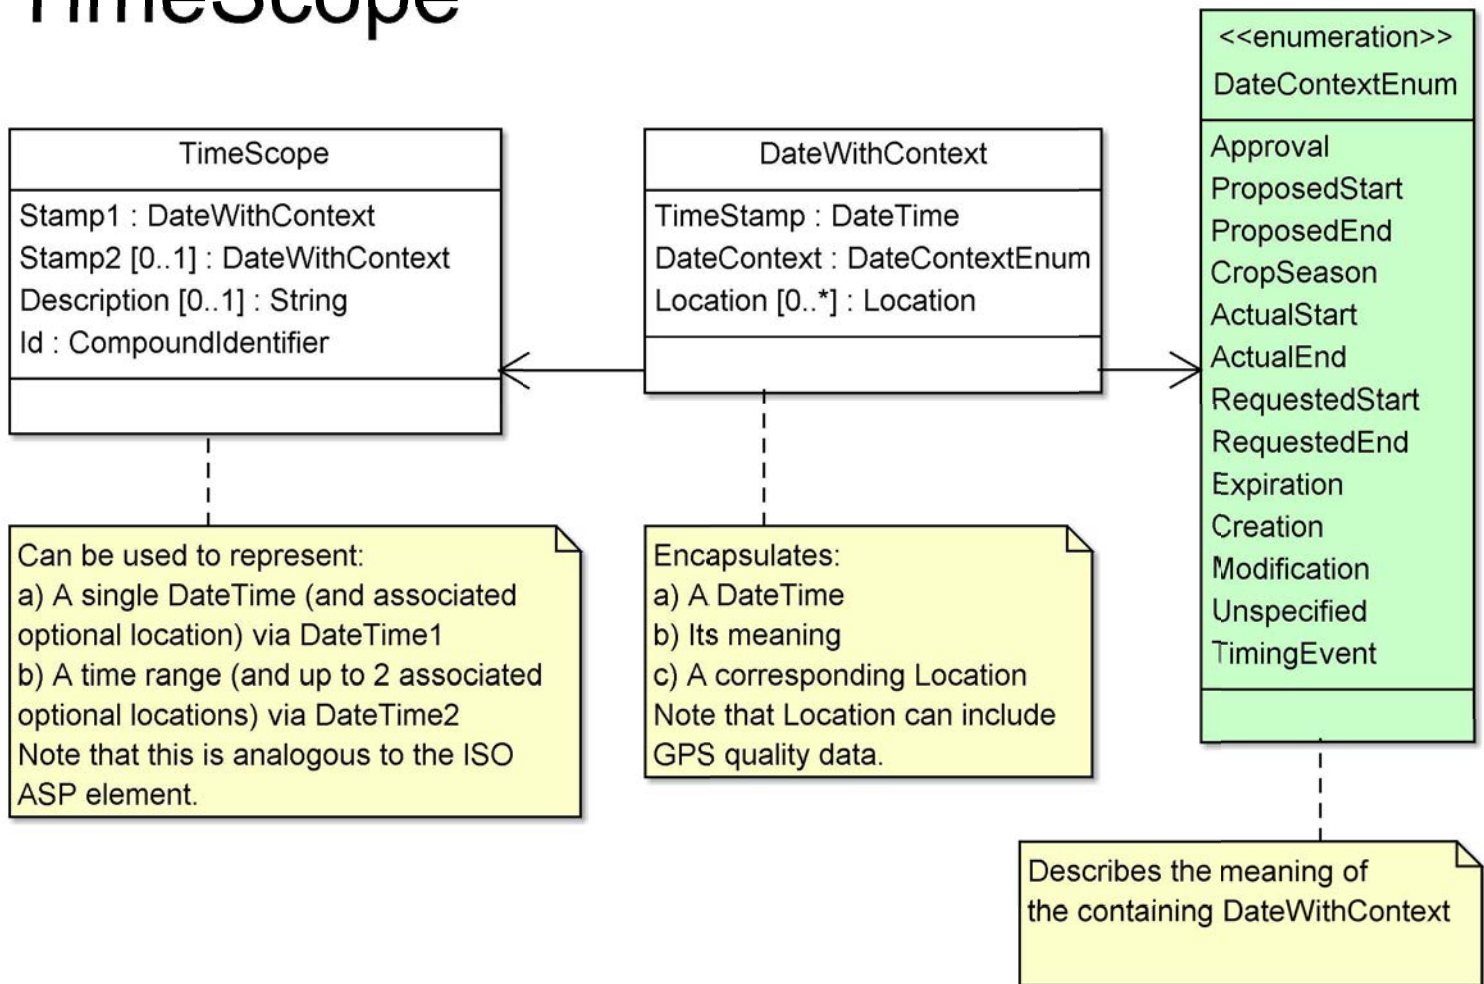

WorkItem

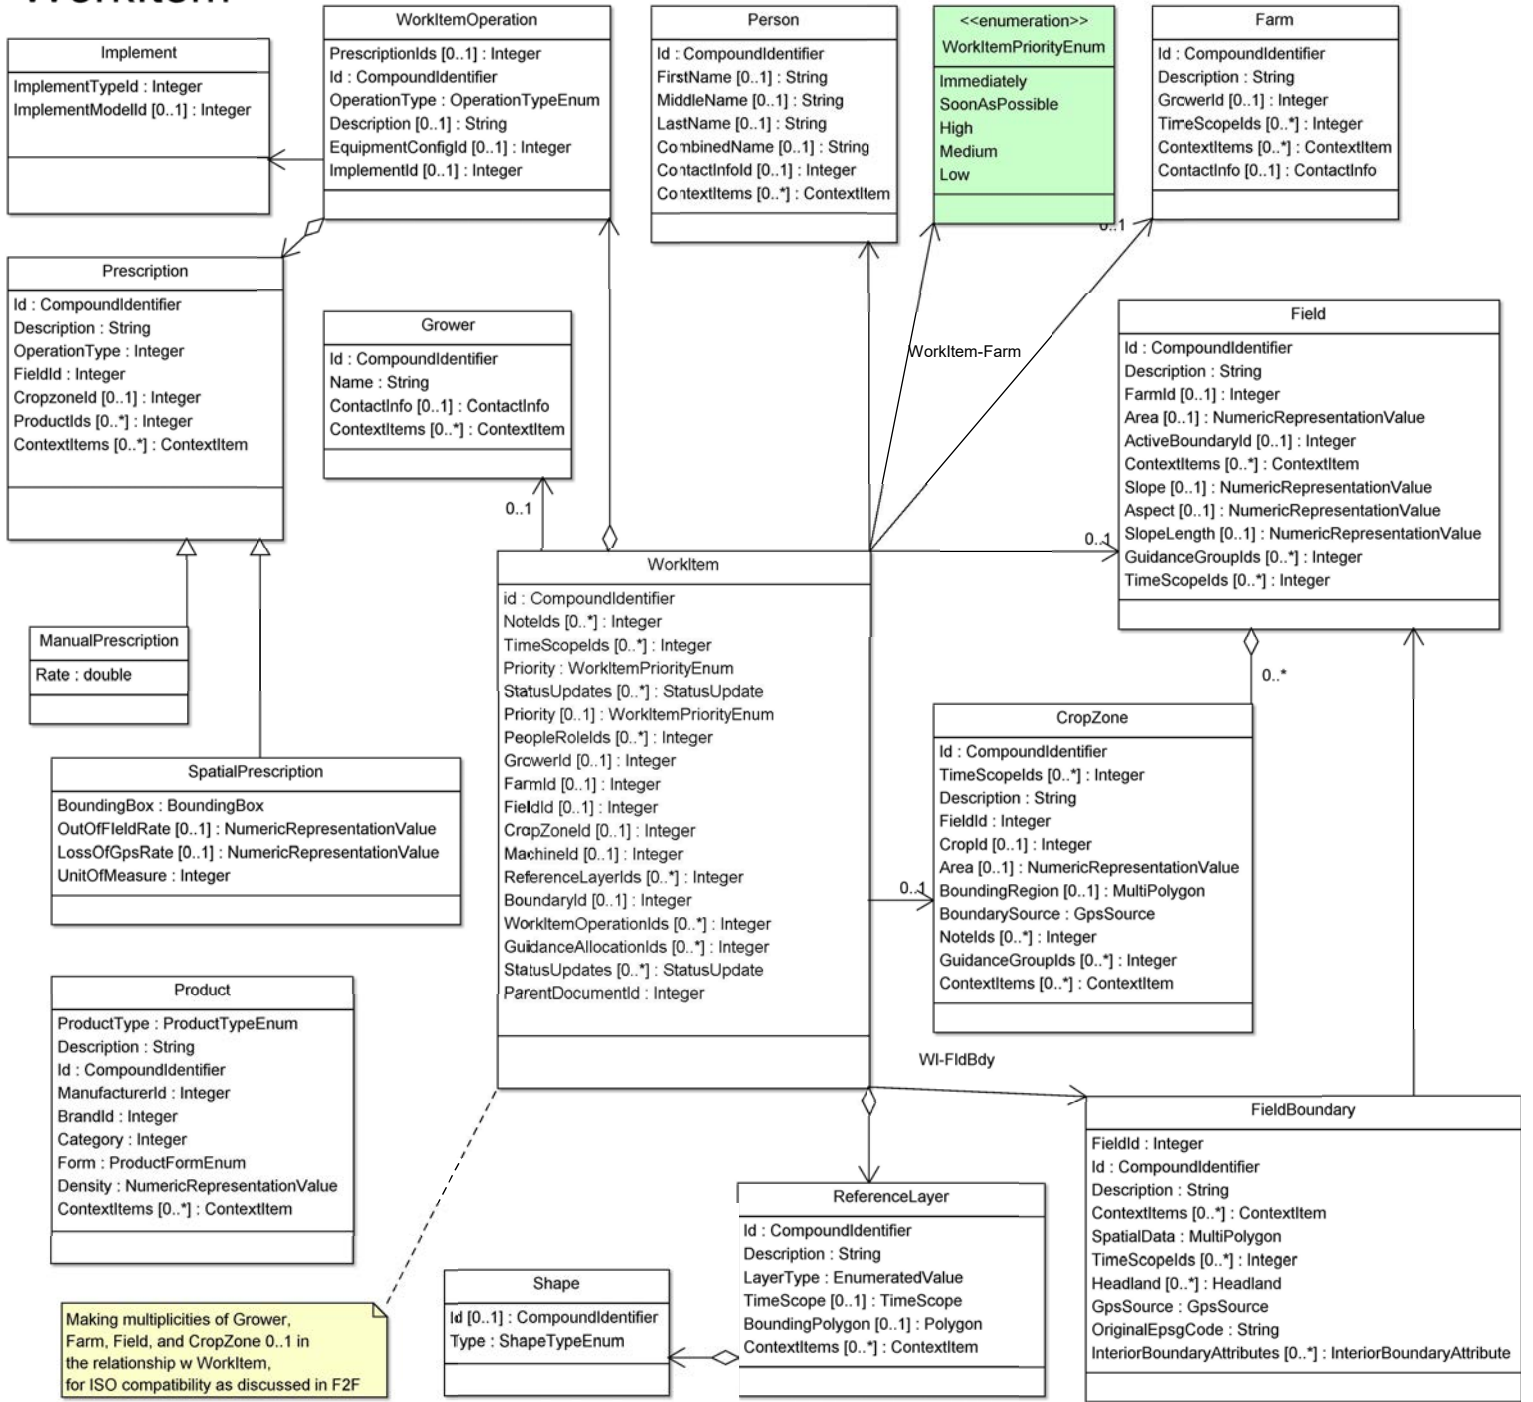

Work Record and Containers

